

# 6-FMX Series

## Front Terminal Battery

### 6-FMX-150C



SHUANGDENG GROUP

shoto




### Main Applications

- Telecom site
- Outdoor base station
- Floating operation site
- UPS

### Benefits

- Front terminal design, easy access for faster installation and maintenance
- Optimal energy density, save floor space
- No leakage and no acid smog spray during the operation

### Dimensions

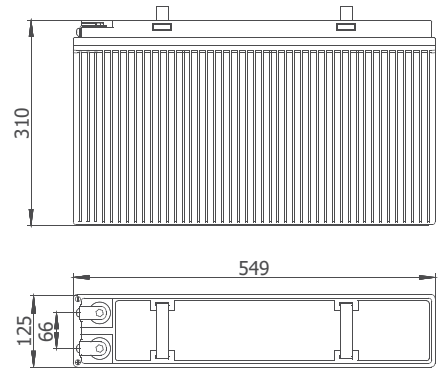

### Technical Parameters

Nominal Voltage	12 V
Capacity	150 Ah @ 10hr to 1.80 V per cell @ 25°C (77°F)
Weight	52 kg(114.64 lbs)
Dimensions	Length: 549 mm (21.61 in) Width: 125 mm (4.92 in) Height: 310 mm (12.20 in)
Internal Resistance (full charged)	3.5 mΩ
Short-circuit Current	2607 A
Self Discharge @25°C(77°F)	Less than 4% after 30 days storage
Operating Temperature Range	Discharge: -40°C ~ 50°C(-40°F ~ 122°F) Charge: -20°C ~ 45°C(-4°F ~ 113°F) Storage:-20°C ~ 40°C(-4°F ~ 104°F)
Recommended Operating Temperature	15°C ~ 25°C (59°F ~ 77°F)
Recommended Charging Current	30 A
Charging Voltage @25°C(77°F)	Float: 2.23 V/cell Equalize: 2.35 V/cell
Terminal	M6
Container Materials	ABS/ABS V0 (Optional)
Capacity Affected by Temperature(C <sub>10</sub> )	103% @ 40°C(104°F) 85% @ 0°C(32°F) 60% @ -20°C(-4°F)
Design Life @25°C(77°F)	12 years

### Certification

- ISO 9001: 2008
- ISO 14001: 2004
- GB/T 28001- 2011
- UL
- CE

### Technical Features

- Excellent capacity retention rate
- Long life float service design
- Excellent over discharge recovery capability

# 6-FMX Series

## Front Terminal Battery

### 6-FMX-150C







#### Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	30min	1hr	2hr	3hr	4hr	5hr	6hr	8hr	10hr	12hr
1.70V	165.1	92.0	60.2	46.1	36.5	28.6	23.9	19.5	16.2	13.4
1.75V	156.0	89.1	59.4	45.2	35.9	28.3	23.7	19.4	16.1	13.3
1.80V	147.7	87.1	58.8	44.3	35.5	27.9	23.5	19.2	16.0	13.2
1.83V	141.3	83.4	58.1	43.7	35.3	27.7	23.4	19.1	15.8	13.1
1.85V	136.3	81.1	57.6	43.3	35.0	27.5	23.3	19.0	15.6	13.0

#### Constant Power Discharge Characteristics Unit: W/cell (25°C, 77°F)

F.V/Time	30min	1hr	2hr	3hr	4hr	5hr	6hr	8hr	10hr	12hr
1.70V	299.3	170.8	115.3	90.1	68.1	56.7	47.1	38.9	32.2	27.0
1.75V	286.9	167.8	114.5	88.7	67.5	56.3	46.8	38.6	32.0	26.9
1.80V	274.4	165.9	113.9	87.3	66.6	55.7	46.4	38.5	31.9	26.8
1.83V	265.4	160.4	113.2	86.6	66.0	55.3	46.1	38.4	31.8	26.7
1.85V	259.6	156.6	112.6	86.0	65.6	55.0	45.9	38.3	31.7	26.6

#### Performance Curve

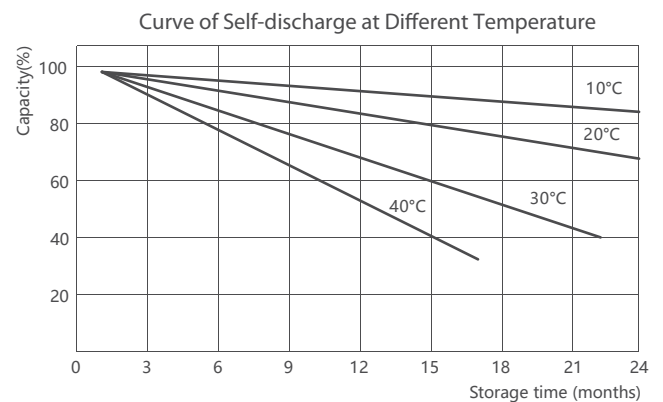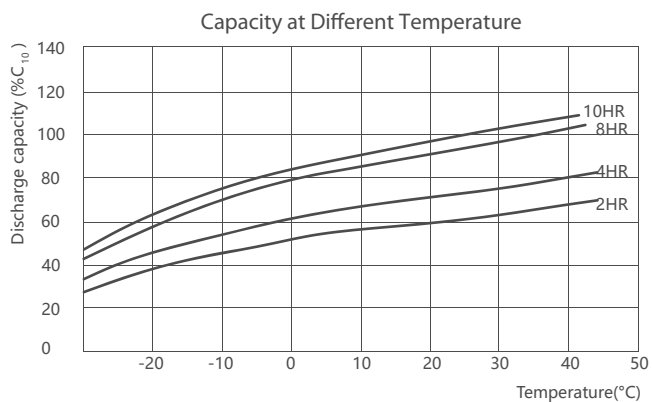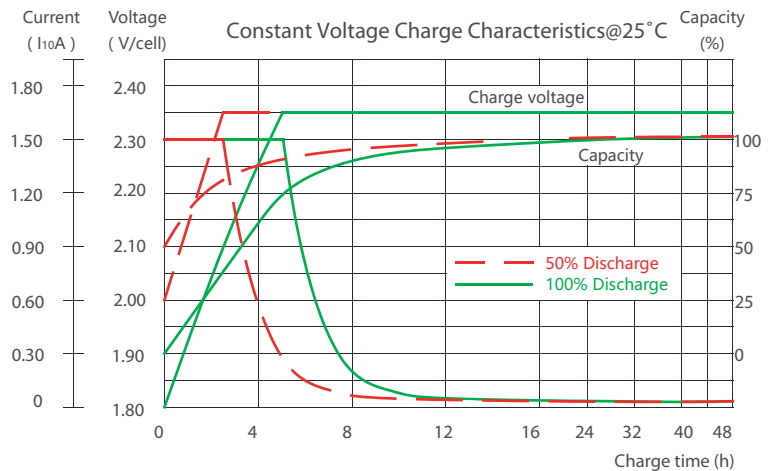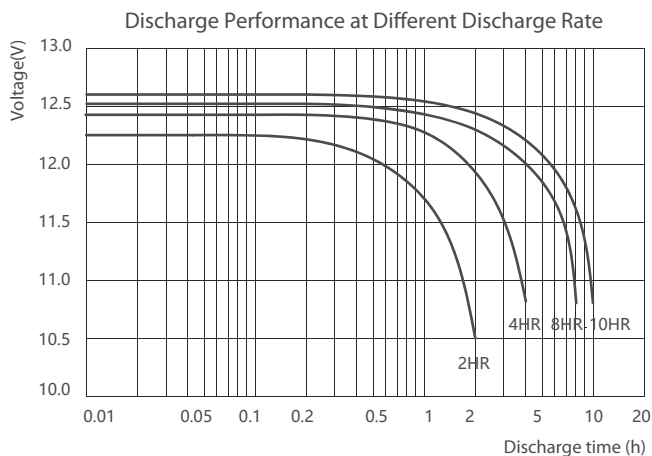

#### \*Declaration:

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact CHINASHOTO for the latest information.

Welcome to Visit : [www.chinashoto.com](http://www.chinashoto.com)