

6-GFM Series

VRLA Battery
6-GFM-7.5




Main Applications

- ▶ UPS/EPS
- ▶ Power systems
- ▶ Telecommunications system
- ▶ Emergency lighting- Auto control system
- ▶ Solar/wind generating storage cyclic
- ▶ Other general purpose

Benefits

- ▶ Optimized capability of instant high-current discharging
- ▶ Excellent deep cycle discharge capability
- ▶ Strong high and low temperature performance
- ▶ Long life

Dimensions

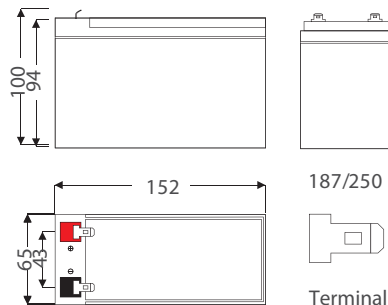

Technical Parameters

Nominal Voltage	12V
Nominal Capacity	7.5Ah
Design life	5 years
Terminal	187/250
Approx. Weight	Approx 2.21kg (4.87lbs)
Container Material	ABS
Rated Capacity	7.50 Ah 20Hour Rate (0.375A to 10.5V) 5.82 Ah 3Hour Rate (1.94A to 10.5V) 4.95 Ah 1Hour Rate (4.95A to 9.60V)
Internal resistance	Full charged at 25°C : 23.0 mΩ
Max. Discharge Current	113A(5S)
Operating Temperature	Discharge: -20 ~50°C (-4 ~ 122°F) Charge : -20 ~50°C (-4 ~ 122°F) Storage: -20 ~50°C (-4 ~ 122°F)
Charge Method (25 °C)	Charge current: Max. 1.88A; Recom.0.75A Float Charge voltage(-3mV/°C): 13.5-13.8V,recom.13.5V(Full floating system) 13.5-13.8V,recom.13.62V(Cycle use system) Equalize charge:13.8-14.1V,recom.14.1V(-4mV/ °C) Cycle charge:14.4-15.0V,recom.14.4V(-5mV/ °C)
Self discharge	3% of capacity declined per month at 25°C

Certification

- ISO9001: 2008
(NO.03015Q10076R4M)
- ISO14001: 2004
(NO.03016E10080R2L)
- GB/T 28001-2011
(NO.03014S10092R2M)

Technical Features

- ▶ High corrosion resistant performance:
Pb-Ca multi-alloy grid
- ▶ High energy density and power density
- ▶ Excellent charge acceptance ability
- ▶ Precision sealing technology

6-GFM Series

VRLA Battery
6-GFM-7.5







Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	5min	10min	15min	30min	1hr	2hr	3hr	4hr	5hr	8hr	10hr	20hr
1.60V	29.7	19.4	14.5	9.49	4.95	2.84	2.07	1.66	1.41	0.930	0.743	0.398
1.65V	29.5	18.6	13.3	9.01	4.65	2.72	2.01	1.61	1.38	0.915	0.735	0.390
1.70V	24.2	17.5	12.4	8.73	4.50	2.67	1.97	1.52	1.37	0.900	0.720	0.383
1.75V	22.4	16.7	11.6	8.53	4.34	2.60	1.94	1.50	1.31	0.878	0.705	0.375
1.80V	20.6	15.7	10.7	8.25	4.19	2.54	1.84	1.47	1.25	0.855	0.690	0.360

Constant Power Discharge Characteristics Unit: W/cell (25°C, 77°F)

F.V/Time	5min	10min	15min	30min	1hr	2hr	3hr	4hr	5hr	8hr	10hr	20hr
1.60V	55.8	35.0	26.5	16.0	9.08	5.31	3.91	3.14	2.66	1.76	1.44	0.788
1.65V	51.4	33.1	24.9	15.9	8.54	5.11	3.80	3.04	2.61	1.73	1.41	0.766
1.70V	47.0	32.1	23.8	15.9	8.28	5.01	3.74	2.89	2.54	1.71	1.40	0.760
1.75V	42.6	31.1	22.9	15.7	8.04	4.90	3.69	2.85	2.49	1.64	1.37	0.744
1.80V	38.3	30.1	21.9	15.6	7.93	4.86	3.59	2.83	2.43	1.59	1.34	0.739

Performance Curve

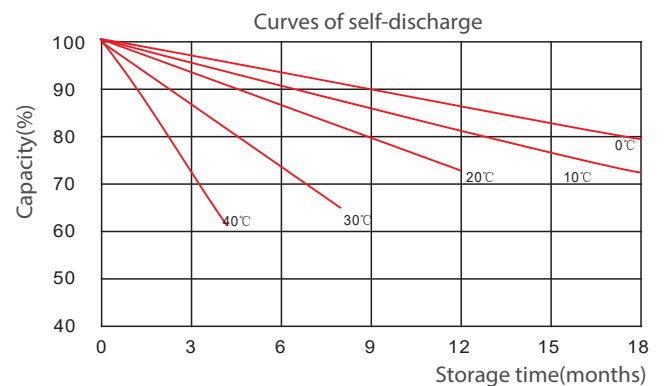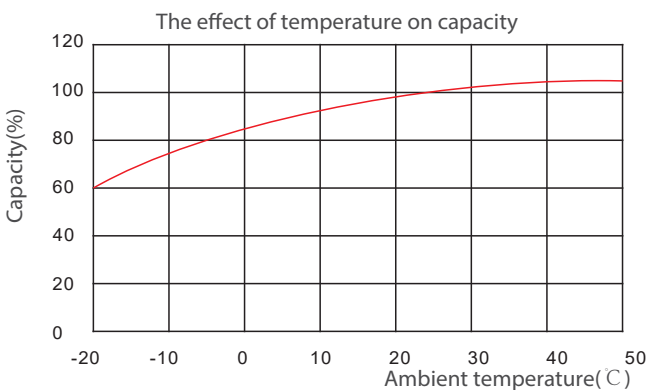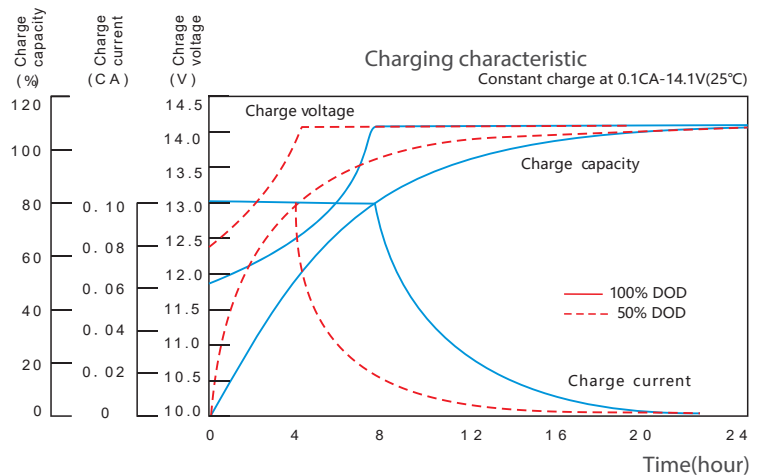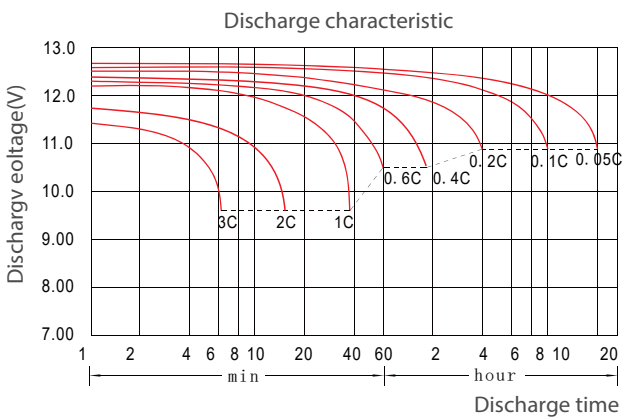

*Declaration:

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact CHINASHOTO for the latest information.

Welcome to Visit : www.chinashoto.com