

# 6-GFMHR

## High Rate Battery


### 6-GFMHR-350XW



### Benefits

- ❑ High rate, can be used in the standby power which less than 15min
- ❑ High consistency, security, reliability and stability
- ❑ Fast charging speed, low self-discharge rate
- ❑ Designed life is 15 years
- ❑ Good anti-high current performance
- ❑ Good anti-over-discharge performance
- ❑ Excellent anti-overcharge performance
- ❑ Good anti-impact performance
- ❑ Excellent anti-vibration performance

### Dimensions

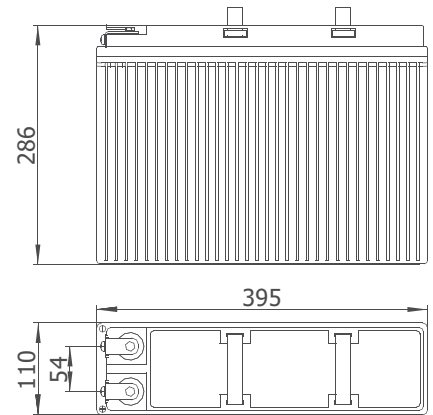

### Technical Parameters

Nominal Voltage	12 V
Rated Power	350W,15min to 1.67V/cell( 25°C)
Weight	31 kg (68.34 lbs)
Dimensions	Length: 395 mm (15.55 in) Width: 110 mm (4.33 in) Height: 286 mm (11.26 in)
Internal Resistance (full charged)	3.6 mΩ
Short- circuit Current	1755 A
Self Discharge @25°C(77°F)	Less than 8% after 90 days storage
Operating Temperature Range	Discharge: -40°C ~ 50°C(-40°F ~ 122°F) Charge: -20°C ~ 45°C(-4°F ~ 113°F) Storage:-20°C ~ 40°C(-4°F ~ 104°F)
Recommended Operating Temperature	15°C ~ 25°C (59°F ~ 77°F)
Recommended Charging Current	13.5 A
Charging Voltage @25°C(77°F)	Float: 2.23 V/cell Equalize: 2.35 V/cell
Terminal	M8
Container Materials	ABS/ABS V0 (Optional)
Capacity Affected by Temperature(C <sub>10</sub> )	105% @ 40°C(104°F) 85% @ 0°C(32°F) 60% @ -20°C(-4°F)
Design Life @25°C(77°F)	15 years

### Certification

- ❑ ISO 9001: 2008
- ❑ ISO 14001: 2004
- ❑ GB/T 28001- 2011

### Technical Features

- ❑ Double-sided smear, cast welding and other processes strengthen the process control and improve battery consistency
- ❑ High-strength ABS material and patented sealing technology ensure the normal use of the battery without leakage, expansion and rupture
- ❑ Corrosion-resistant alloy and stamping process greatly extend the battery life