

GFMHR-LW Series

High-rate Valve-regulated Lead Acid Battery

GFMHR-750W







Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	5min	10min	15min	20min	30min	1h	2h	3h	4h	5h	6h	8h	10h
1.60V	646	503	455	342	271	151	--	--	--	--	--	--	--
1.67V	615	469	425	329	263	149	87	67.5	52.9	43.9	--	--	--
1.70V	590	446	400	314	255	145	85	66.4	51.9	43.5	37.0	29.8	--
1.75V	498	406	365	287	248	140	83	65.2	51.4	43.2	36.5	29.6	24.9
1.80V	449	343	323	252	217	125	80	63.9	50.5	43.0	36.1	29.3	24.3
1.85V	364	281	270	206	181	98	77	59.6	46.6	40.7	34.8	28.1	23.8

Constant Power Discharge Characteristics Unit: W/cell (25°C, 77°F)

F.V/Time	5min	10min	15min	20min	30min	1h	2h	3h	4h	5h	6h	8h	10h
1.60V	1010	886	782	606	480	284	--	--	--	--	--	--	--
1.67V	969	854	750	586	470	276	163	128.4	101.3	85.5	--	--	--
1.70V	901	821	722	557	466	271	161	127.1	99.8	85.2	72.9	58.9	--
1.75V	780	758	677	537	460	263	157	124.6	98.8	84.7	71.8	58.5	48.8
1.80V	730	635	608	470	409	236	153	122.9	97.7	84.4	71.4	58.1	47.6
1.85V	620	550	517	393	348	192	151	119.2	94.1	83.4	71.3	57.6	46.5

Performance Curve

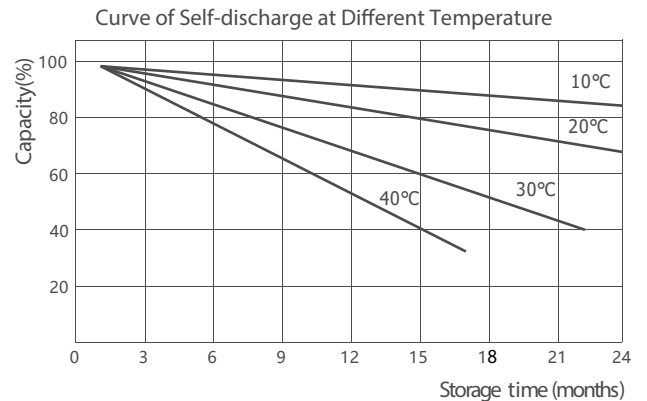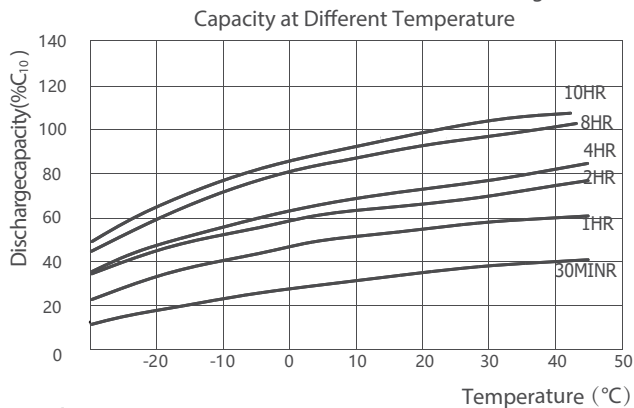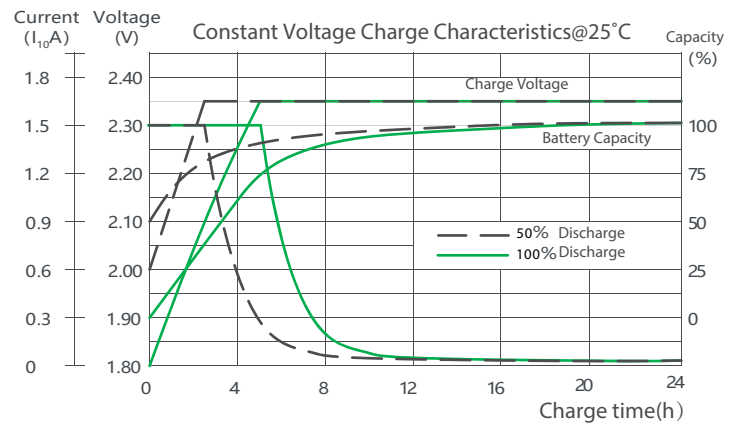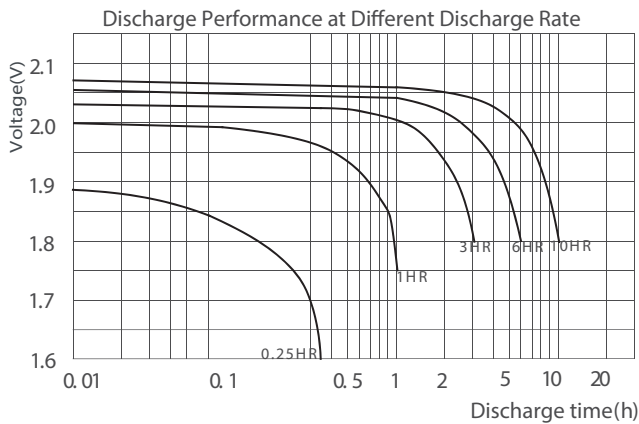

*Declaration:

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact CHINASHOTO for the latest information.

Welcome to Visit : www.chinashoto.com